
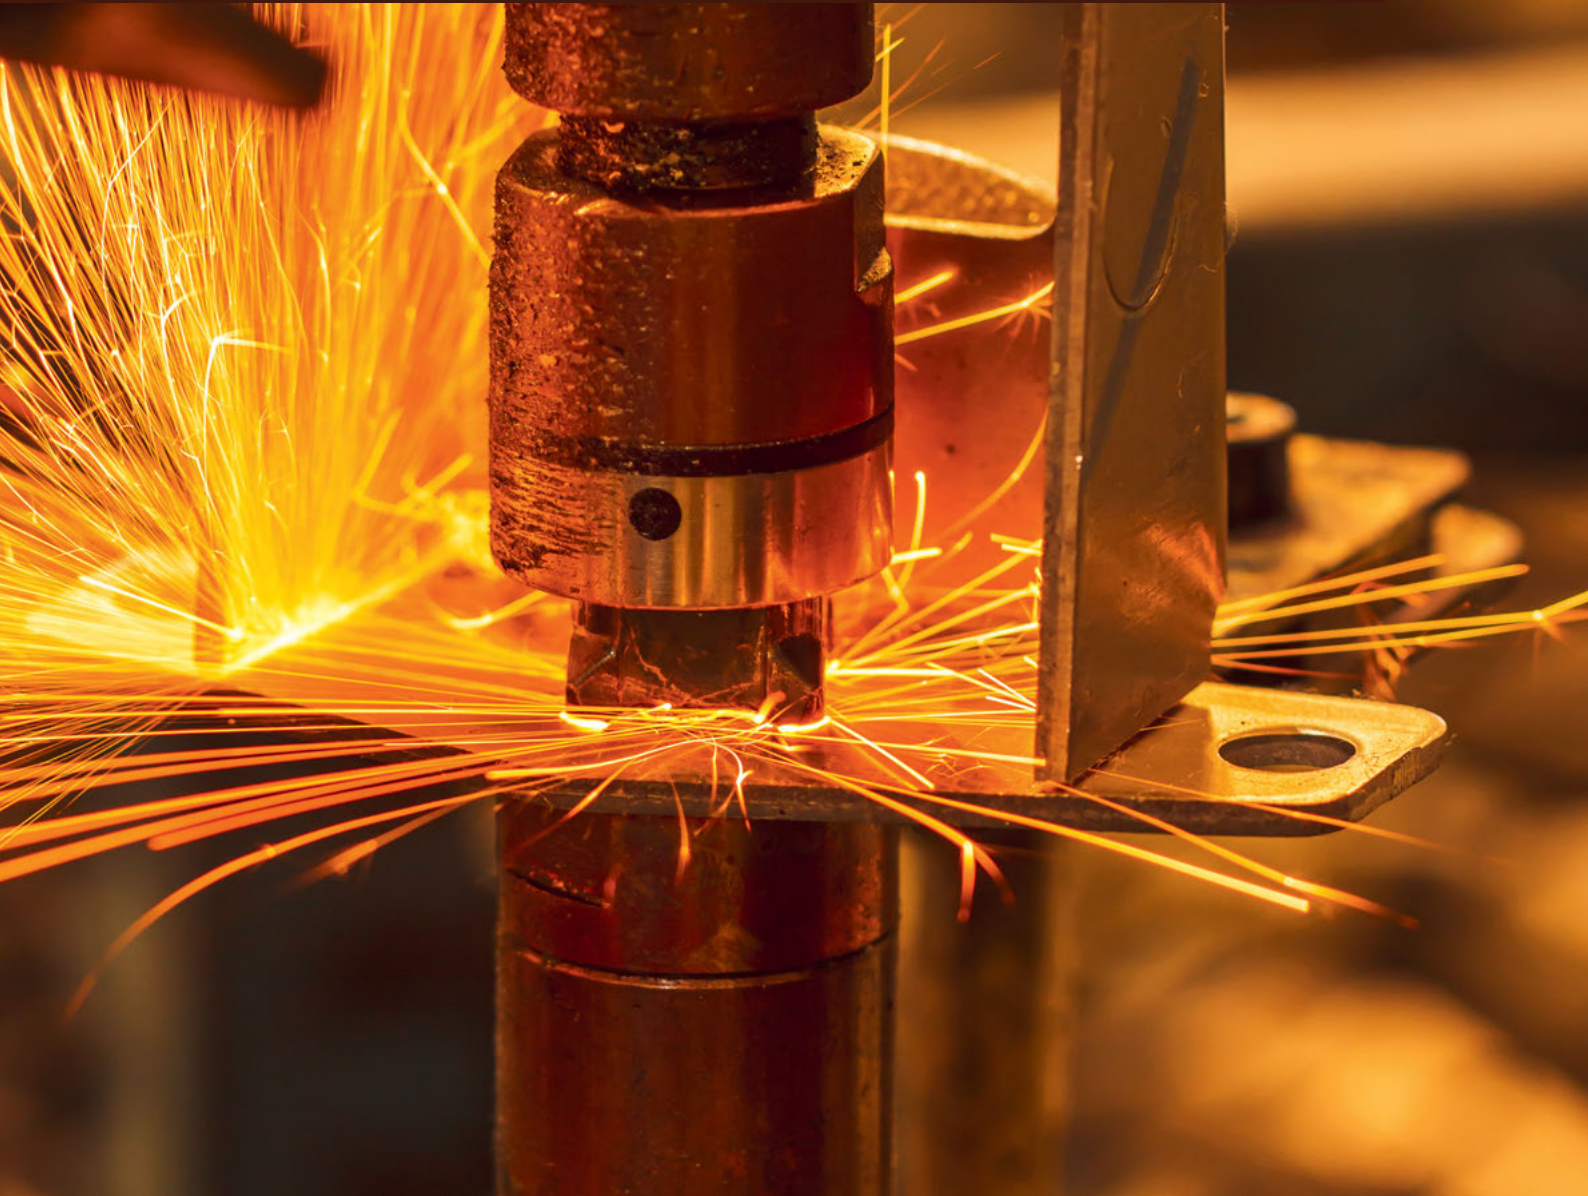


RAISING THE STANDARDS OF  
**MANUFACTURING INDUSTRIES**




**Gerflor**<sup>®</sup>  
theflooringroup

# GERFLOR, PARTNER OF THE MANUFACTURING INDUSTRIES FOR 80 YEARS

A selection of our clients

AUTOMOTIVE - MECHANICAL - PAPERMAKING - TEXTILES -  
PLASTICS PROCESSING - PRINTING




# Machinery OPS-INGERSOLL



*"The floor in our factory was an old stone pavement. GTI Max tiles could be laid quickly and easily, while the production continued, without complex background preparation, without noise and dust!"*

—○ PRODUCTION AREA


# Aircraft **AIRBUS**

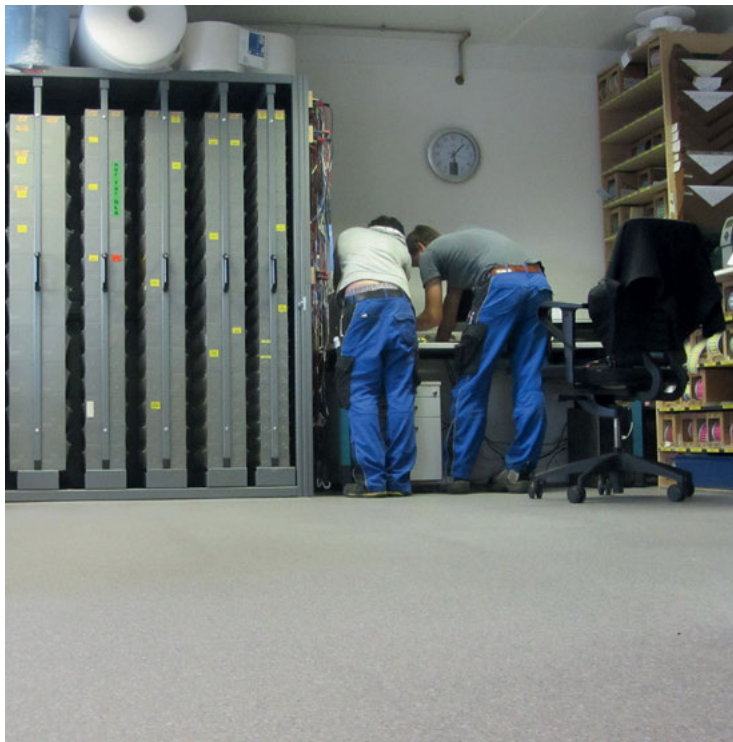

*"GTI Max Connect was the quickest way to renovate our workshop."*

## —○ WORKSHOPS

# Textile industry **BRUNET DENTELLES**

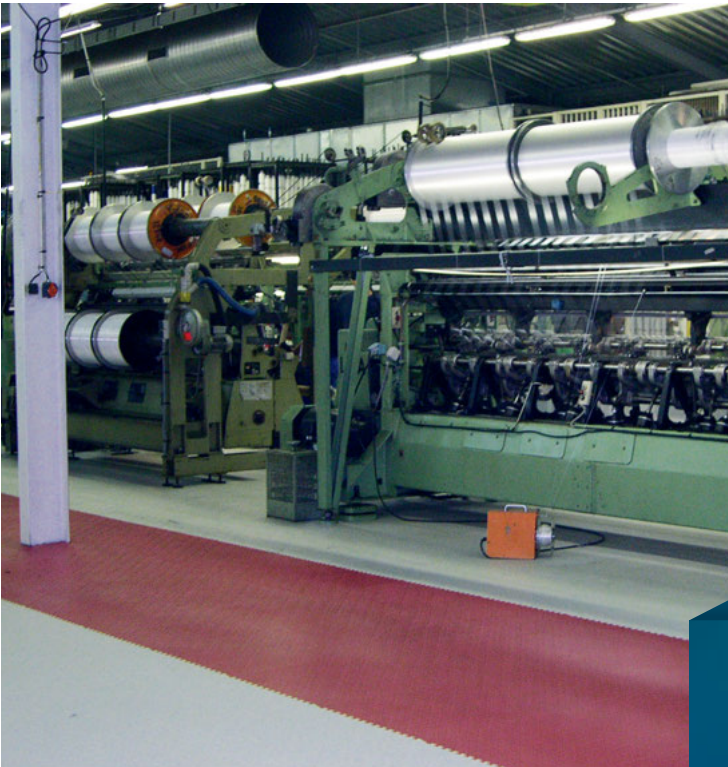

*"With GTI Max Connect we could improve the working conditions in our production area and customize the floor with our logo."*

— ○ WORKSHOPS


# Metal EDELHOFF



*"After more than 10 years of heavy traffic the floor still looks brand new!"*

—○ WORKSHOPS

# Printing PINSKER

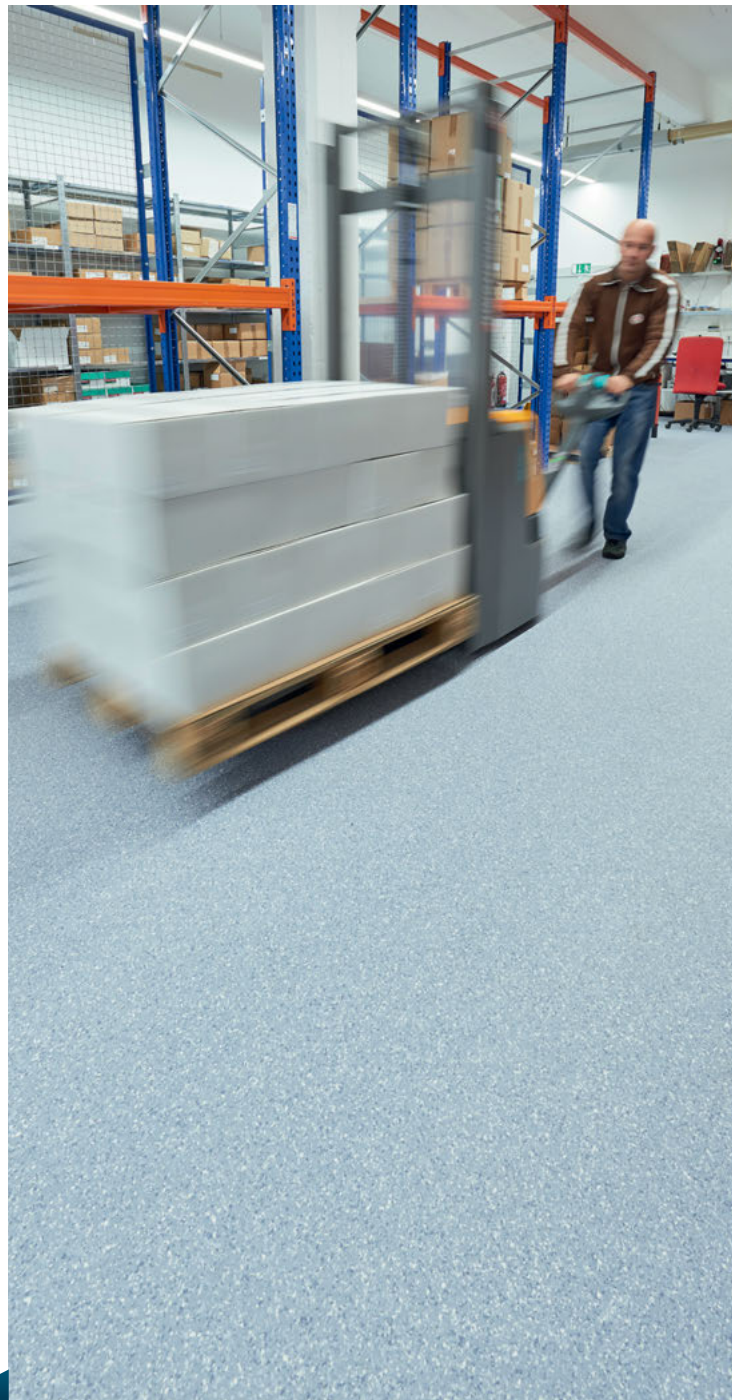

*"GTI Max Connect tiles are very resistant to dynamic and static loads, and provide a great walking and standing comfort"*

—○ STORAGE

# GERFLOR EXPERTISE

## The specifics of the manufacturing industry

In order to evolve in today's competitive markets, manufacturers must demonstrate their capacity to improve the productivity and quality of their products and services.

It covers the following topics:

- COMPLIANCE WITH STANDARDS
- SAFETY
- COMFORT
- QUALITY



All these ideas require the right design and the right equipment on the premises and at the workstations.







# Gerflor solutions satisfy all the requirements of an industrial environment



## **FACILITATING PRODUCTIVITY**

Loose-laid floors offer fast and easy installation



## **ENSURING QUALITY**

### **• Controlled Hygiene**

GERFLOR floorings and wall panels are rot-proof, non-absorbent, watertight, non-porous, and reduce bacterial growth.

### **• Ease of maintenance**

Our products benefit from factory-applied surface treatments to prevent dirt retention and incrustation.

### **• Durability**

Thanks to their flexibility and their resistance to scratching and abrasion, GERFLOR solutions can be used without the material cracking or breaking (in normal use conditions). Factory-made material, the quality of our floorings is known and controlled.



## **ENSURING SAFETY**

### **• Design of work zones**

- Numerous possibilities for marking and zoning by colour coding and logos

### **• Protection of employees**

- Non-slip products against risk of falling  
- ESD products against electrical risks

### **• Protection of premises and equipment**

- Solutions for ATEX area



## **IMPROVING COMFORT AT WORK**

### **• Improvement of working conditions**

- Reduces noise nuisance  
- Comfortable to walk on and stand on  
- Antistatic, no «heavy legs» syndrome  
- No unpleasant odour  
- Thermal insulation  
- Range of colours to improve visual comfort at work

# A GLOBAL SOLUTION FOR EACH AREA OF YOUR INDUSTRY

## WASHING AREA

Tarasafe  
SPM Decoclean  
Clean Corner System

## PREPARATION



GTI EL5 CleanTech

## LABORATORY

Mipolam BioControl  
Mural Ultra / Mural Plus  
Clean Corner System

## PRODUCTION


GTI Max Connect  
SPM Decochoc

## PACKAGING

GTI Max Connect

## CHANGING ROOM

Tarasafe range  
Mural Calypso

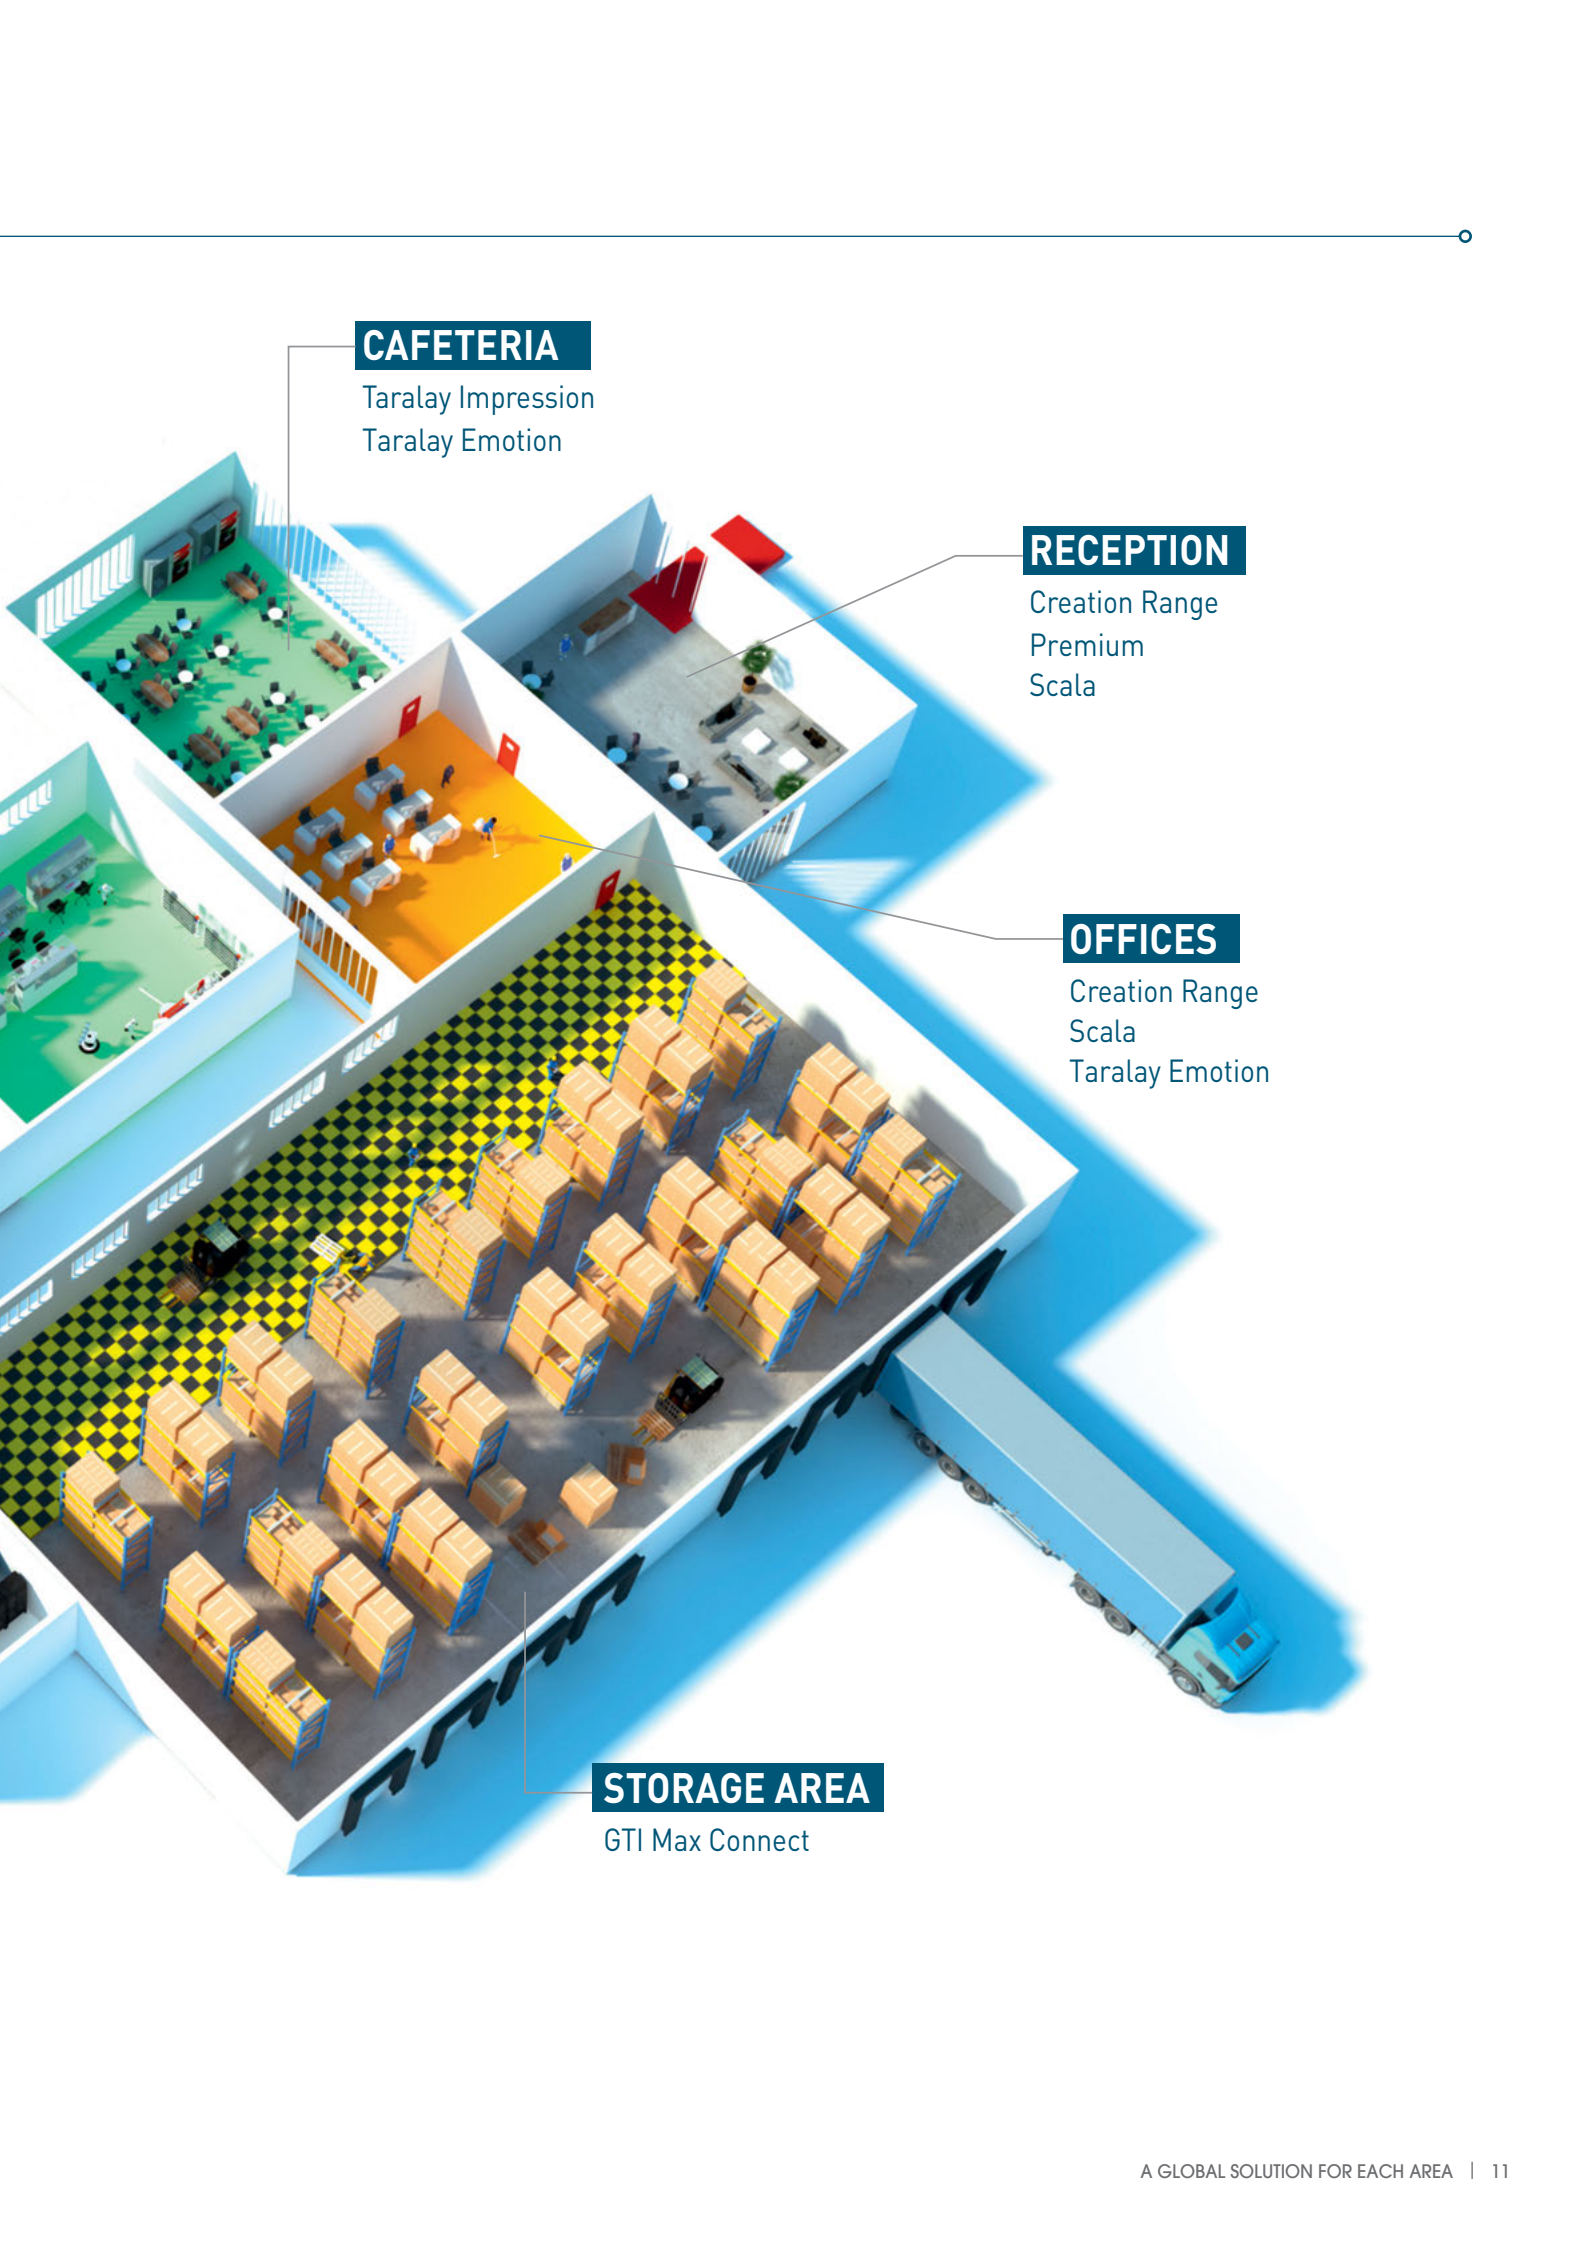

**CAFETERIA**

Taralay Impression  
Taralay Emotion

**RECEPTION**

Creation Range  
Premium  
Scala

**OFFICES**

Creation Range  
Scala  
Taralay Emotion

**STORAGE AREA**


GTI Max Connect

# FLOORINGS RENOVATION SOLUTIONS





# GTI MAX CONNECT

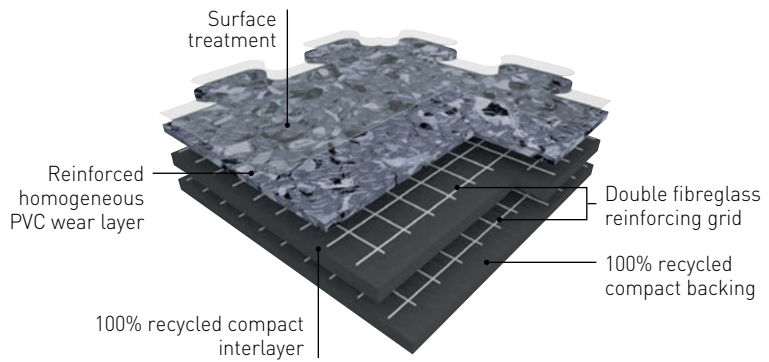

## RUGGED & EASY TO INSTALL



### RESISTANCE TO TRAFFIC

- Resistance to heavy and intensive traffic
- Robust installation with interlocking dovetails



### QUICK AND EASY INSTALLATION

- No adhesives
- No curing time
- Can be installed on a **subfloor that is unsuitable for gluing**
- Tolerates **small defects** in the subfloor
- Replacements or modifications in the area without stopping work



### COMFORTABLE WORKING CONDITIONS

- High **non-slip properties** to guarantee safety for employees
- Identification of the different circulation areas with several zoning possibilities and a wide choice of colours
- Flexible materials to provide comfort when standing at work



### EASY MAINTENANCE

- Non-porous surface

## GTI MAX LOGOS

- Improve zoning with our six logos, which offer the same advantages as GTI Max Connect



0001 Caution



0004 Stop



0003 Arrow



0002 Forklift



0005 No entry




0006 Pedestrian






## Attraction

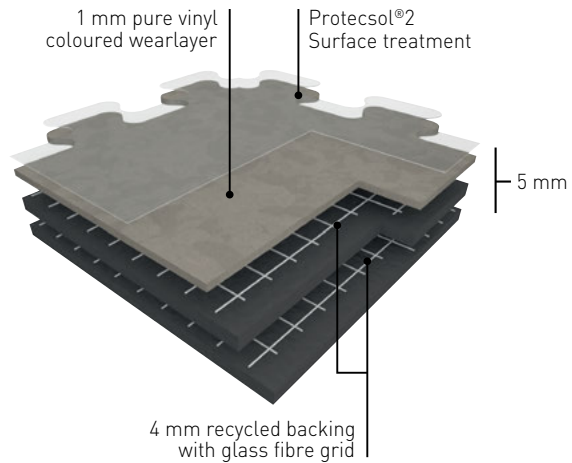

- Easy renovation :looselay installation
- No immobilisation of the premises = no loss of turnover
- Resistance to traffic : 1mm wearlayer
- Easy maintenance :Protocolsol® 2 surface treatment

## Premium

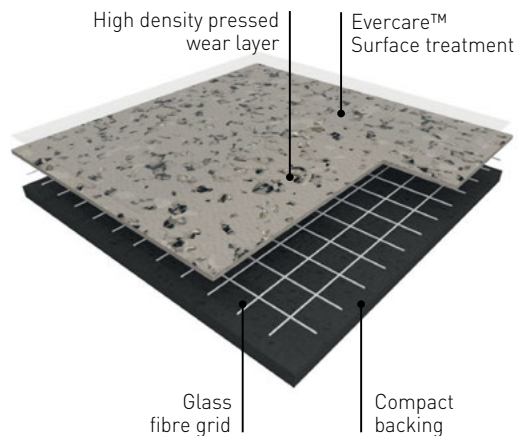

- Extreme traffic resistance: wear layer >1mm, with NO filler for an outstanding abrasion and scratch resistance
- Good acoustic performance: (8dB)
- Indentation resistance (0.02mm): glass fibre grid
- Evercare™ surface treatment: easy maintenance and matt effect
- Long lasting appearance: design within the whole thickness of the wearlayer
- TVOC after 28 days <math><10\mu\text{g}/\text{m}^3</math>: indoor air quality

**ASIA:** Gerflor Asia  
 Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998  
 e-mail: gerflorasia@gerflor.com

**OTHER COUNTRIES:** Gerflor International  
 Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13  
 e-mail: gerflorcontract@gerflor.com

gerflor.com  
 gerflor.asia

**ARCHITECTURE  
 DECORATION  
 SPORT  
 TECHNOSPECIFIC**

JUN 2020-06-15 Version - Indicative documentation cost USD 1.26  
 Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.

**Gerflor** *Don't forget* our complementary ranges!



Handrails



Wall Coverings & Protections




Entrance mats



Skirtings & Profiles

and *Be* **CONNECTED!**

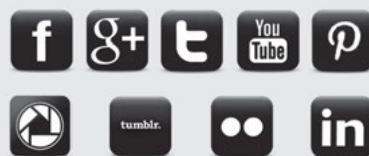

**WE CARE | WE ACT.** Our Commitments for a Sustainable future



**CARBON FOOTPRINT\***

-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup> between 2020 and 2025



**BIOSOURCED CONTENT\*\*\***

10 % by 2025



**RECYCLED CONTENT**

30 % by 2025



**ADHESIVE FREE\*\***

35 % by 2025



**ANNUAL VOLUME RECYCLED**

60 000 t by 2025

\* Scopes 1 and 2 defined in the GHG protocol \*\*\* % of activity with biosourced materials \*\* % of activity - adhesive free solution

**Gerflor**<sup>®</sup>  
 theflooringgroup